


This easy add on emergency flasher switch is a simple heavy duty switch which requires a 1/2" mounting hole. The switch also requires a separate flasher that is fused to protect the circuit.

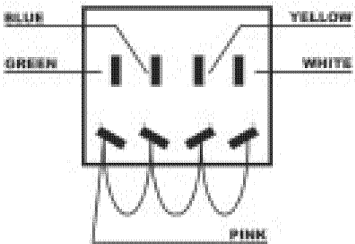

Blue: Splice to the right front turn signal wire.
White: Splice to the right rear turn signal wire.
Yellow: Splice to the left rear turn signal wire.
Green: Splice to the left front turn signal wire.
Pink: Connect to the emergency flasher. The flasher should be connected to a "fused" battery feed circuit.

RON FRANCIS
Wiring

FW-24

**TOGGLE
EMERGENCY
FLASHER
SWITCH**

Four-Way Hazard Switch
with factory bezel